

REVISIONS

Rev	ECN	Description	Date	Approved
A	C15574	Release to production	7/15/09	DC
B	C43420	Change tolerance	11/30/10	DC
C	C55225	Changed water proof spec to IP67	5/15/12	AP
D	C59355	Add loctite threadlocker to connector	11/28/12	AP



Approvals	Date	Bulkhead GPS Antenna – 3V TNC		
DRAWN DC	8/7/09	RoHS Compliant Trimble Specification		
CHECKED		Sheet	Size	Drawing Number
ISSUED		1 of 6	A	70228-00-SP
				Revision D

TRIMBLE NAVIGATION LIMITED
BULKHEAD ANTENNA
GPS ANTENNA WITH LOW NOISE AMPLIFIER
RoHS COMPLIANT

Part Number 70228-00

Part Number 70228-00-SP

Copyright © 2009
Trimble Navigation Limited
935 Stewart Drive
Sunnyvale, CA 94085

All rights reserved


SPECIFICATION FOR GPS ANTENNA WITH LOW NOISE AMPLIFIER
RoHS COMPLIANT

- 1.0 APPLICATION
THIS SPECIFICATION DESCRIBES THE ELECTRICAL AND MECHANICAL CONDITIONS OF THE TRIMBLE BULKHEAD ANTENNA, P/N 70228-00.
- 2.0 SYSTEM
THIS ANTENNA SYSTEM CONSISTS OF TWO FUNCTIONAL BLOCKS LISTED BELOW.
- 2.1 ANTENNA ELEMENT
- 2.2 LNA
SEE ATTACHED FIGURE 2.1
- 3.0 GENERAL
- 3.1 ENVIRONMENTAL CONDITIONS
- | | | |
|-------|-----------------------|-----------------|
| 3.1.1 | OPERATING TEMPERATURE | -40°C TO +85°C |
| 3.1.2 | STORAGE TEMPERATURE | -40°C TO +100°C |
| 3.1.3 | RELATIVE HUMIDITY | 20% TO 95% |
- 3.2 ELECTRICAL SPECIFICATIONS
- | | | |
|-------|-------------------|---------------|
| 3.2.1 | INPUT VOLTAGE | 3.0V +/- 0.5V |
| 3.2.2 | POWER CONSUMPTION | 35mA MAX. |
| 3.2.3 | OUTPUT CONNECTOR | TNC (FEMALE) |
- 3.3 MECHANICAL SPECIFICATIONS
- | | | |
|-------|--------------------------------|----------------------------------------------------------------------------------|
| 3.3.1 | MOUNTING | NUT MOUNT |
| 3.3.2 | WATER PROOF | IP67 with Cap on Connector |
| 3.3.3 | SHOCK | 50G : VERTICAL AXIS
30G : ALL AXIS |
| 3.3.4 | VIBRATION | 10 ~ 200Hz. LOG. SWEEP 3.0G
(SWEEP TIME : 15 MIN.), 3 AXIS |
| 3.3.5 | ANTI-COROSION | BASED ON JIS Z 2371, SPRAY 5%
SALT WATER 35°C SHOULD NOT
RUST AFTER 96Hrs. |
| 3.3.6 | CONFIGURATION AND
DIMENSION | SEE MECHANICAL DRAWING |
| 3.3.7 | WEIGHT | 150g MAX. |

SPECIFICATION FOR GPS ANTENNA WITH LOW NOISE AMPLIFIER

4.0	ANTENNA	
4.1	FREQUENCY RANGE	1,575.42 ± 1.023MHz
4.2	GAIN	90° : 3.0dBi MIN. 20° : -5.0dBi MIN.
4.3	POLARIZATION	RHCP
4.4	AXIAL RATIO	90° : 4.0dB MAX. 10° : 6.0dB MAX.
5.0	LNA	
5.1	FREQUENCY RANGE	1,575.42 ± 1.023MHz
5.2	GAIN	26dB MIN.
5.3	NOISE FIGURE	1.8dB MAX. (+25°C ± 5°C) 2.3dB MAX. (+85°C)
5.4	OUT OF BAND REJECTION	$f_0=1,575.42\text{MHz}$ $f_0\pm 20\text{MHz}$ 7dB MIN. $f_0\pm 30\text{MHz}$ 12dB MIN. $f_0\pm 50\text{MHz}$ 20dB MIN. $f_0\pm 100\text{MHz}$ 30dB MIN.
5.5	OUTPUT IMPEDANCE	50Ω
5.6	OUTPUT VSWR	2.0 MAX.
6.0	OVERALL SPECIFICATIONS (THROUGH ANTENNA, LNA, CABLE AND CONNECTOR)	
6.1	FREQUENCY RANGE	1,575.42 ± 1.023MHz
6.2	GAIN	28 dBi MIN. (-40°C ~ +85°C)
6.3	NOISE FIGURE	2.0dB MAX. (+23°C) 2.5dB MAX. (+85°C)
6.4	OUTPUT IMPEDANCE	50Ω
6.5	VSWR	2.0 MAX.
6.6	OSCILLATION	NO OSCILLATION MUST BE FOUND IN BAND AND OUTBAND.
7.0	MTBF	TBD
8.0	RECOMMENDED STORAGE CONDITION AND STORAGE TERM	STORE IN ROOM CONDITION AS LISTED BELOW: TEMPERATURE -20°C~+45°C, HUMIDITY 80% MAX.
9.0	RELIABILITY TEST	TBD
10.0	EXTERNAL APPEARANCE	NO STAIN OR FLAW MUST BE FOUND.
11.0	DATA	GAIN (AT 4.75V ± 0.2V $f=1575\text{MHz}$) AND POWER CONSUMPTION AT ROOM TEMPERATURE.

REVISIONS				
ECN	REV	DESCRIPTION	DATE	APPROVED
C-4400	A	PRODUCTION RELEASE	8/31/09	D.C.
C-5850	B	Change tolerance	11/30/10	DC
C-5850	C	ROTATE THE NAMEPLATE	3/7/12	AP
C-5825	D	ADDED CANADIAN FCC LABEL	5/14/12	AP
C-5885	E	ADD LOCTITE THREADLOCKER	11/28/12	AP

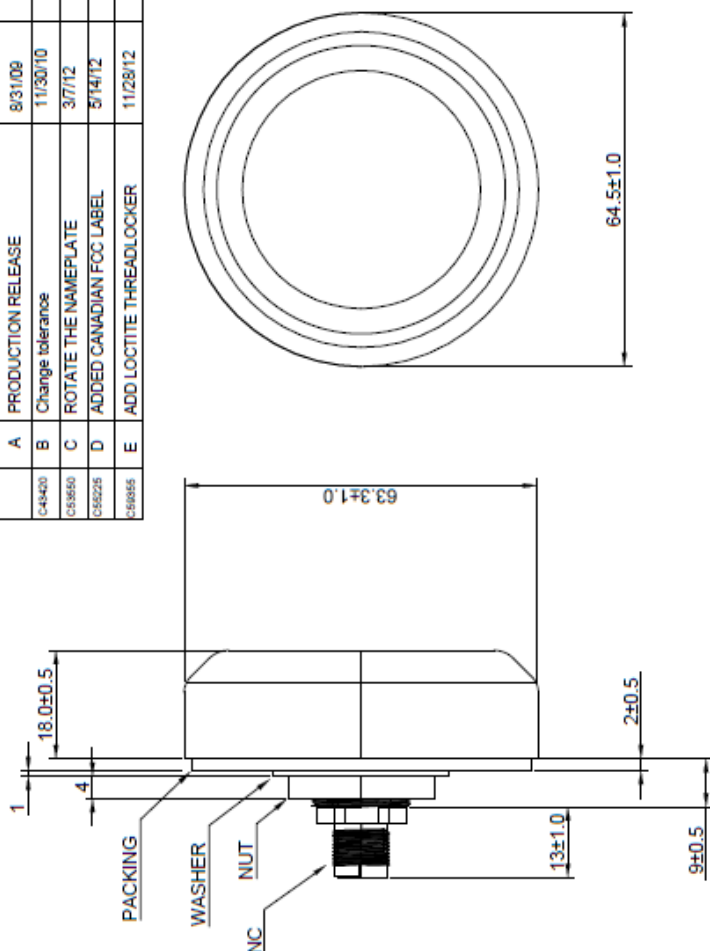

- NOTES:
- BEFORE INSTALLING TNC CONNECTOR, APPLY LOCTITE 262 THREADLOCKER TO SECURE THE TNC CONNECTOR TO THE BASE.
 - LABEL TO BE 50 MICRON THK SILVER MAT ON POLYESTER FILM WITH PERMANENT ADHESIVE.
 - PRINTING TO BE BLACK, UV PROTECTION, HELVETICA BOLD CONDENSED.
 - SERIAL NUMBER TO BE 9 DIGITS CODED AS FOLLOWS
 XX Y ZZ WWWW
 WHERE, XX = DATE (DAY) OF THE MONTH.
 Y = NUMBER OF THE MONTH 1-9 OCT+0, NOV=N DEC= D
 ZZ = YEAR AS 2009=09
 WWWW = ORIGINAL NUMBER OF THE UNIT PRODUCED ON THAT DAY (IE 0001 THRU 9999)

		BULKHEAD GPS ANTENNA - TNC	
CONTRACT NO.	APPROVALS	DWG NO.	SHEET 1 OF 1
CRITICAL DIMENSION TO DIMENSION LINE	DATE 8/31/09	FSCM NO. 70228-XX-AD	REV E
DRAWN D.C.	CHECKED	SCALE 2X	SHEET 1 OF 1
DECIMALS X ± 1.0 X.XX ± 0.05	ANGLES X ± 1.0 X.XX ± 0.05	ALL DIMENSIONS IN mm	DO NOT SCALE DRAWING
TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MM	FRACTIONS X/16 ± 0.0005 X/32 ± 0.001 X/64 ± 0.0015 X/128 ± 0.002	FINISH	

FILE: 70228-XX-AD